



## CONTROL RELAY FOR VOLTAGE

- S105CS1-B	:	MONOPHASE	230 V
- S105CS1-C	:	MONOPHASE	230 V
- S105TCS-1	:	TRIPHASE	380 V
- S105TCS-2	:	TRIPHASE	230 V
- S105TCS-3	:	TRIPHASE	400 V

Microprocessor type device appropriately designed for the protection of loading which can be damaged by feeding voltages which are either too low or too high. The delayed restoration of the loading makes it particularly suited for checking the compressors of the refrigeration systems.

The use of a microprocessor makes it possible to obtain for the intervention threshold and very precise and repetitive timing.

### TECHNICAL CHARACTERISTICS

Power supply:	Available in various versions for the control of the monophase and triphase voltage 50 Hz. Protected by means of a varistor.
Consumption:	2 VA
Alarms:	Control of the maximum and minimum voltage. Programmable with a DIP-switch at $\pm 12\%$ , $\pm 16\%$ , $\pm 20\%$ of the nominal voltage. Hysteresis to restoration fixed equal at 4 %.
Intervention delay:	Fixed equal to 3 s
Restoration delay:	Programmable by means of a DIP-switch of 6 m, 6 m e 10 s, 6 m e 20 s, 6 m e 30 s, 6 m e 40 s, 6 m e 50 s, 7 m, 10 s (TEST position).
Relay:	S105CS1-B : 1 SPST contact with capacity of 10 A 250 Vac (resistive loading). S105CS1-C, S105TCS-1-2-3 : 1 SPDT exchange with capacity of 10 A 250 Vac (resistive loading).
Signalling:	Green LED presence of the power supply Red LED : ALARM Yellow LED : DELAY IN RESTORATION
Temperature:	-10 °C / + 60 °C
Humidity:	90 % a + 40 °C ( non condensable )
Dimension:	Box made of self-extinguishing noryl 3 DIN modules ideal for hooking onto 35 mm profiles, 52,5 x 90 x 73 mm ( b x h x p ).
Weight:	250 g approximately

## 1 PROGRAMMING OF THE THRESHOLDS

The relay has two thresholds (a minimum and a maximum) which can be programmed by means of the DIP-switches no. 1 and no. 2 in order to obtain 3 different bands of normal functioning :  $\pm 12\%$ ,  $\pm 16\%$  o  $\pm 20\%$  referred to the nominal value of the voltage that is to be checked

	$\pm 12\%$ DIP-switch : 1 OFF / 2 OFF		$\pm 16\%$ DIP-switch : 1 ON / 2 OFF		$\pm 20\%$ DIP-switch : 1 ON / 2 ON	
	Min	Max	Min	Max	Min	Max
S105CS1-B	202 V	258 V	193 V	267 V	184 V	276 V
S105CS1-C	202 V	258 V	193 V	267 V	184 V	276 V
S105TCS-1	334 V	426 V	319 V	441 V	304 V	456 V
S105TCS-2	202 V	258 V	193 V	267 V	184 V	276 V
S105TCS-3	352 V	448 V	336 V	464 V	320 V	480 V

## 2 FEEDING OF THE DEVICE

When the device is switched-on, the red alarm LED will light up for approximately 5 seconds and the relay will remain deactivated.

Once the 5 seconds have lapsed :

- if the voltage to be checked is within the normal functioning band, the red LED **A** will switch-off and the yellow re-insertion delay LED **T** will light up, during this entire phase, this relay will remain deactivated.
- if the voltage to be checked is out of the normal functioning band, the red LED **A** will begin to flash; it will then pass to delay of re-insertion only once the voltage to be checked has returned to a value within the normal functioning band. The hysteresis when re-entering the normal functioning band is fixed at 4%.

Once the delay in restoration has been terminated, the yellow LED **T** will switch-off and the relay will be activated.

## 3 ALARM

During normal functioning the red LED **A** and the yellow LED **T** are switched-off and the relay is deactivated.

When the voltage to be checked exits the normal functioning band, the red LED **A** will light up.

- if within 3 seconds the voltage to be checked re-enters the normal functioning band, the red LED **A** will switch-off and there will be no relay intervention.
- if after 3 seconds the voltage to be checked is still out of the normal functioning band, the red LED **A** will begin to flash and the relay will be deactivated.

In this case, when the voltage to be checked re-enters the normal functioning band, the red LED **A** will switch-off and the yellow delay in restoration LED **T** will light up. The hysteresis when re-entering the normal functioning band is fixed at 4%.

Once the delay in restoration has been terminated, the yellow LED **T** will switch-off and the relay will be activated.

## **4 PROGRAMMING OF THEV DELAY IN RESTORATION**

The duration of the delay in restoration can be programmed by means of the DIP-switches nr. 3, nr. 4, nr. 5 e nr. 6 : 3 OFF / 4 OFF / 5 OFF / 6 OFF the delay to re-insertion lasts 6 minutes.

If placed in the ON position, DIP-switch no. 5 will add 10 seconds.

If placed in the ON position, DIP-switch no. 4 will add 20 seconds.

If placed in the ON position, DIP-switch no. 3 will add 30 seconds.

If places in the ON position, DIP-switch no. 6 puts the device in **TEST** condition, in this case the delay in re-insertion lasts 10 seconds regardless of the position of the other DIP-switches.

## **5 ELECTRIC CONNECTIONS**

### **S105CS1-B**

Power supply and voltage to be checked :

L1 : Clamp 1

N : Clamp 3

Relay outputs (1 contact SPST with a capacity of 10 A 250 Vac on the resistive loading) :

Load : Clamp 12

N : Clamp 5

Note : the relay is indicated in normal conditions, that is, activated.

### **S105CS1-C**

Power supply and voltage to be checked :

L1 : Clamp 1

N : Clamp 3

Relay outputs (1 contact in exchange SPDT with a capacity of 10 A 250 Vac on the resistive loading) :

Normally closed : Clamp 10

Normally open : Clamp 11

Common : Clamp 12

Note : the relay is indicated in normal conditions, that is, activated.

### **S105TCS-1 - S105TCS-2 - S105TCS-3**

Power supply and voltage to be checked (see the version of the device) :

L1 : Clamp 1

L2 : Clamp 3

L3 : Clamp 5

Note : the power supply of the device is connected between the phases L1 and L2



Relay outputs (1 contact in exchange SPDT with a capacity of 10 A 250 Vac on the resistive loading) :

Normally closed : Clamp 10

Normally open : Clamp 11

Common : Clamp 12


Note : the relay is indicated in normal conditions, that is, activated.

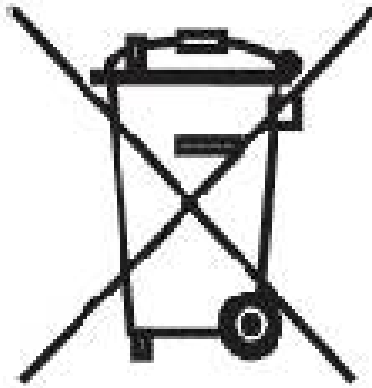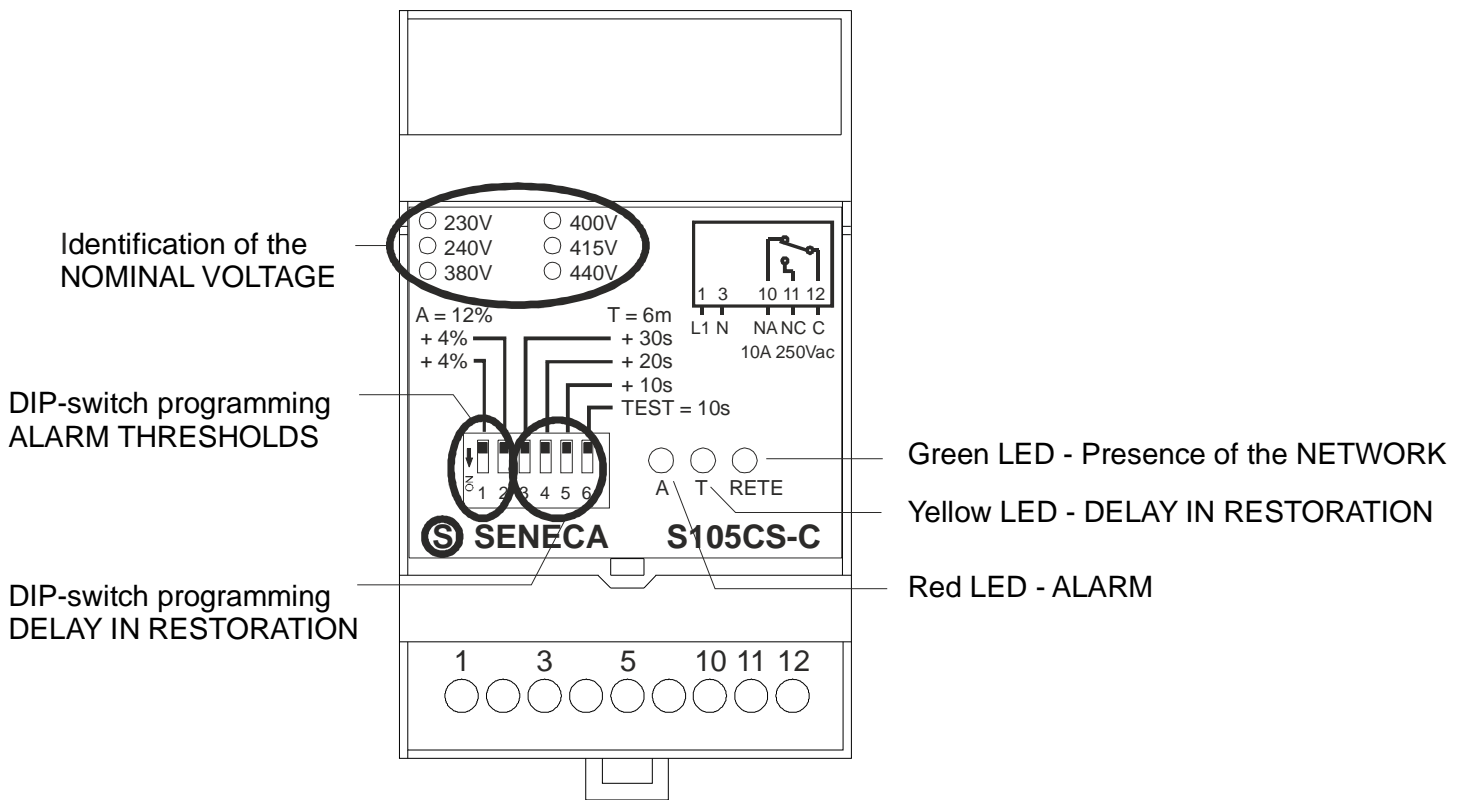

**Disposal of Electrical & Electronic Equipment (Applicable throughout the European Union and other European countries with separate collection programs)**

This symbol, found on your product or on its packaging, indicates that this product should not be treated as household waste when you wish to dispose of it. Instead, it should be handed over to an applicable collection point for the recycling of electrical and electronic equipment. By ensuring this product is disposed of correctly, you will help prevent potential negative consequences to the environment and human health, which could otherwise be caused by inappropriate disposal of this product. The recycling of materials will help to conserve natural resources. For more detailed information about the recycling of this product, please contact your local city office, waste disposal service or the retail store where you purchased this product.

This document is property of SENECA srl. Duplication and reproduction are forbidden, if not authorized. Contents of the present documentation refers to products and technologies described in it. All technical data contained in the document may be modified without prior notice Content of this documentation is subject to periodical revision.

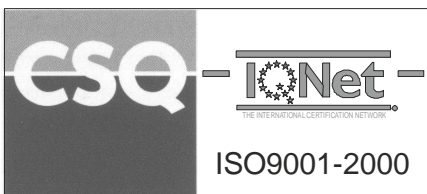

**SENECA s.r.l.**  
 Via Austria, 26 - 35127 - PADOVA - ITALY  
 Tel. +39.049.8705355 - 8705359 - Fax +39.049.8706287  
 e-mail: [info@seneca.it](mailto:info@seneca.it) - [www.seneca.it](http://www.seneca.it)