




EASY-USB

USB ↔ TTL CONVERTER

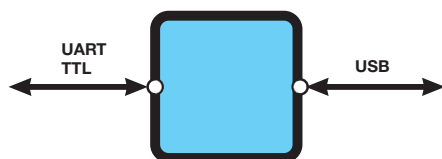

EASY-USB is a serial communication converter that convert the signal from the USB to a standard UART TTL signal and viceversa. EASY-USB can be use to configure a Seneca device that has an UART TTL serial port.

Through the installation of a provided driver for yours OS the EASY-USB will be configured as a standard communication port, this allow to use the EASY-USB with any configuration software that exploit the serial standard port (COM1, COM2 etc).

TECHNICAL SPECIFICATIONS

General Data

Power supply	5V from PC up to 100 mA
Connection modality	From USB
Protection Degree	IP20
Operating Temperature	-10 °C... +65 °C
Dimension (W x H x D)	84 x 21 x 17 mm

SERIAL UART TTL

Connector	RJ11
Voltage level for TTL	5 V
Baud rate	300 bps up to 250 kbps

SERIAL USB

Connector	USB A Type
Standard compatibility	1.0, 1.1, 2.0


Standard

O.S. compatibility	Windows 10/8.1/8/7, Vista, XP Windows Server 2016, 2012 R2, 2012, 2008 R2, 2008, 2003 Linux kernel 3.0.0-19 or later Mac OS X 10.3 or later, Mac OS 9, Mac OS 8 Windows Mobile 6.5/5, Windows Mobile 2003SE/2003 Windows CE 2013, Windows CE 7.0/6.0, Windows CE 5.2-4.2
--------------------	---

Approval	CE
----------	----

Norms	EN 61000-6-4, EN 64000-6-2, EN 61010-1, EN 60742
-------	--



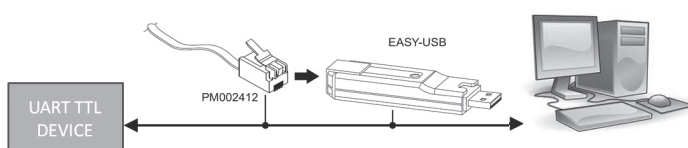

APPLICATION NOTE



ORDER CODES

Code	Description
EASYUSB	USB ↔ TTL converter, drivers and cable included

SIMILAR PRODUCTS

			
K107USB	S117P1	S107USB	S107P
RS485 ↔ USB serial converter	USB ↔ RS485/RS232/TTL serial isolator/converter (desk)	RS485 ↔ USB serial converter (desk)	RS232 ↔ RS485/422 serial isolator/converter (desk)